



LoCrete 500 Raised Floor System


The LoCrete System is a fully functional Corner-Locking Raised Flooring system for Commercial Projects where floor to ceiling height space is restricted or where sub-floor weight bearing capacity is limited for overlaying with carpet tiles.

The System Comprises of a 500mm x 500mm x 28mm panel steel panel which sits on a uniquely designed pedestal that will take the overall system height from 50mm - 100mm.


The panels are secured to the supporting understructure by cornerlock screws at each corner .

The panel comes in two variants either hollow for Projects where sub-floor loadings must be kept to a minimum or filled with foamed cement.

LoCrete 50mm Pedestal

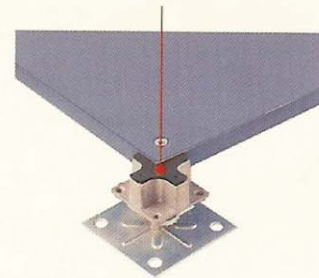

Geometric Domes of Diecast Base create inherent strength

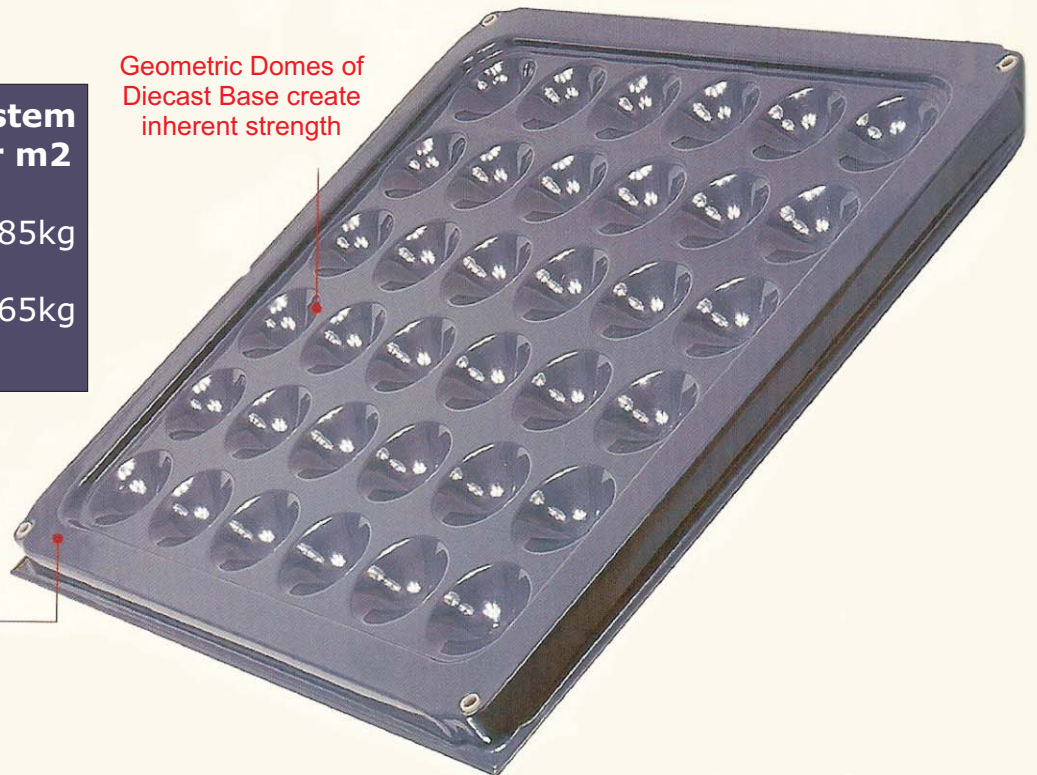

LoCrete Weight	Panel	System per m2
Hollow	4.2kg	17.85kg
Filled	9.4kg	38.65kg

LoCrete 500 panel.

500 x 500 Steel Casing with Epoxy Painted Finish. Top and Bottom sheets are spot welded together to form extremely strong construction.

Performance

Point Load > 2.6 Kn

Ultimate Load > 8.0 Kn

BSEN 12825 Classification
3/A/3/1
(3x Safety Factor)

- ★ Ultra Low Raised Floor System
- ★ Secure Corner-Locking Panel
- ★ Lightweight option Available
- ★ Robust Fast Track Product
- ★ Complies with BSEN 12825:2001